


SUMMARY

NP-305-6 Series is the pressure gauge is designed to ensures enough performance and the life of the instrument in fluid is mixed with coagulation powder, high corrosive.

Such as petrochemical, corrosive fluid, cement, paper factory, ect. used in the dust, fluid mixed with solid, high temperature, High viscosity fluid, industrial special fluids line.

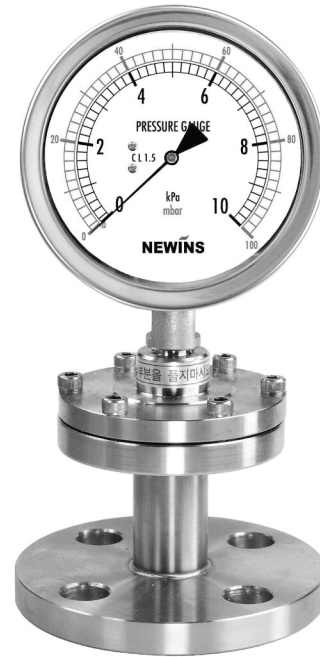


Model. NP-305-6

SPECIFICATIONS

- ▷ **Diameter** : 100mm
- ▷ **Accuracy**
100mm : $\pm 1.5\%$ of Full Scale
- ▷ **Scale Range** :
100mm : -2 kPa ~ 0, ± 1 kPa ~ ± 20 kPa,
0 ~ 35 kPa
- ▷ **Working Pressure** :
Static Pressure : 75% of Full Scale
Fluctuating Pressure : 60% of Full Scale
- ▷ **Working Temperature**
Ambient : -20~80°C
Fluid : -20~80°C
- ▷ **Process connection** :
STS 316
- ▷ **Element**
STS 304, STS 316
- ▷ **Case, Cover**
STS 304
- ▷ **Upper Flange**
STS 304, STS 316
- ▷ **Under Flange**
STS 304, STS 316
- ▷ **Movement**
Brass
- ▷ **Dial**
Aluminum
White Coating
- ▷ **Pointer**
Aluminum
Black Coating
- ▷ **Type** :
NP-305-6 (Direct Flange Type)
- ▷ **Window**
Safety Glass
- ▷ **Process connection** :
See Flange Standard Table
- ▷ **Diaphragm** :
STS 304, STS 316, Hastelloy-C
Titanium, Tantalum, Nickel, Alloy20
- ▷ **Optional extras** :
Diaphragm and lower Flange are available in PTFE Coating or PTFE Lining.

DIMENSION

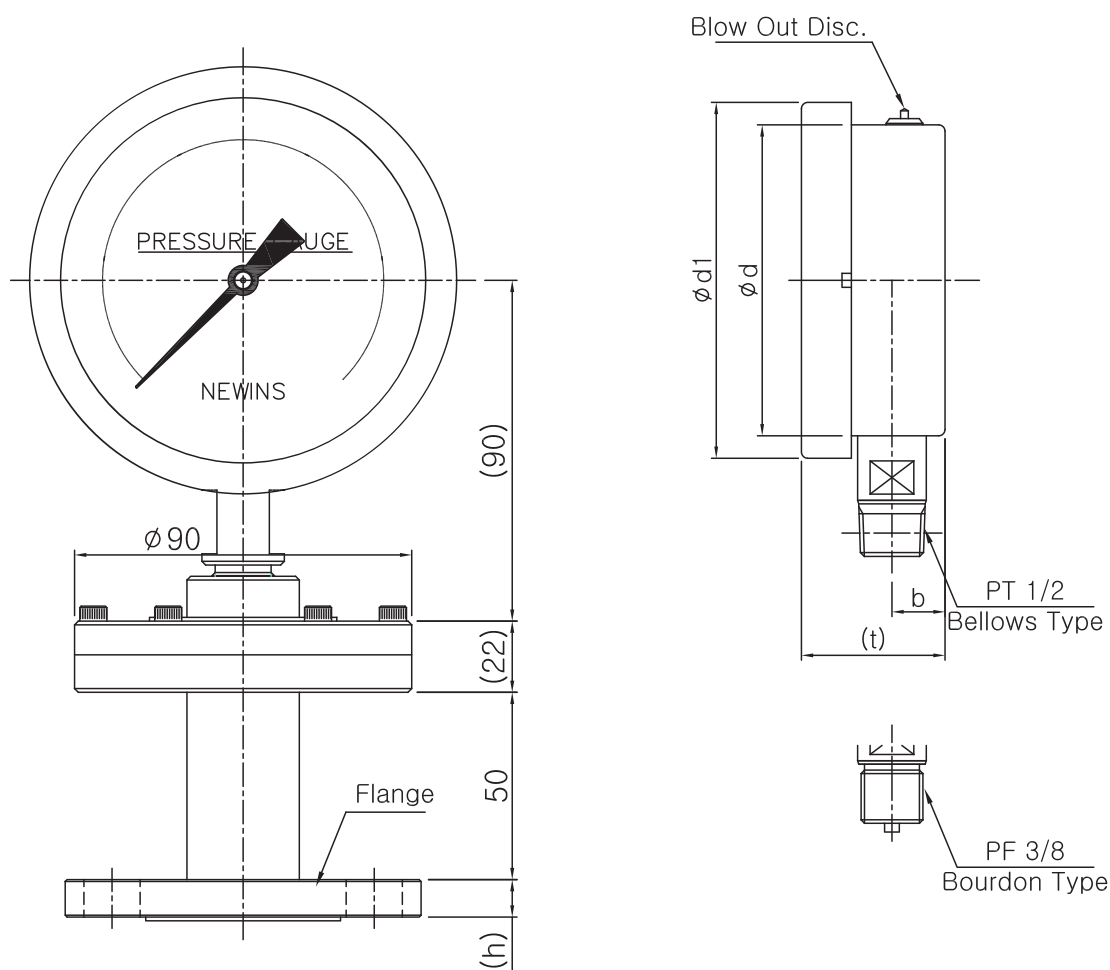

Model.NP-305-6

STANDARD SPECIFICATIONS

Dimensions (mm)									
Dial	Model No.	Ø d	Ø d1	b	t	JIS 10kgf/cm ² (Type)	h	ANSI CLASS #150 (Type)	h
100	NP-305-6	100	114	17	(46)	15A (Type "A")	12	1/2B (Type "A")	11.5
						20A (Type "B")	14	3/4B (Type "A")	13
						25A (Type "B")	14	1B (Type "B")	14.5
						32A (Type "B")	16	1 1/4B (Type "B")	16
						40A (Type "B")	16	1 1/2B (Type "B")	17.5
						50A (Type "B")	16	2B (Type "B")	19.5