


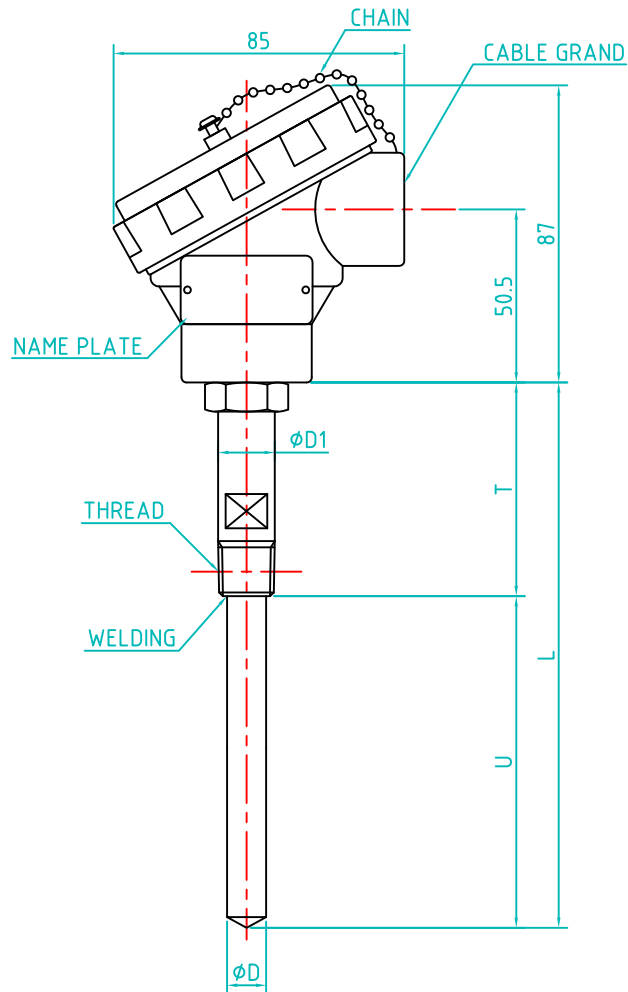

* RESISRANCE TEMPERATURE DETECTOR

1. MODEL : R-534A

2. CONSTRUCTION : WEATHER PROOF

3. HEAD

MATERIAL : ALUMINUM ALLOY (METALLIC SILVER)

4. TERMINAL BLOCK MATERIAL : PHENOL RESIN

5. ELEMENT ☒ Pt 100 ohm at 0 °C ☐ JPt 100 ohm at 0 °C

6. GRADE ☐ A-CLASS ☒ B-CLASS

7. SHEATH OUTER DIAMETER (D)

☐ 3.2 ☐ 4.8 ☒ 6.4 ☐ 8.0 ☐ OTHER _____

8. SHEATH MATERIAL

☐ 304SS ☒ 316SS ☐ OTHER _____

9. TERMINAL BLOCK & LEAD WIRE

☒ SINGLE (3 WIRE) ☐ DOUBLE (6 WIRE)

10. CABLE GRAND

☒ PF $\frac{1}{2}$ ☐ PT $\frac{1}{2}$ ☐ NPT $\frac{1}{2}$ ☐ PF $\frac{3}{4}$ ☐ PT $\frac{3}{4}$ ☐ NPT $\frac{3}{4}$

11. NIPPLE SIZE (D1) & MAT'L

☒ 15A(21.7mm) ☐ 20A ☐ 25A

☒ 304SS ☐ OTHER _____

12. NIPPLE LENGTH (T1)

☐ 80 ☒ 100 ☐ 150 ☐ 200 ☐ OTHER : UNION

13. THREAD & MAT'L

☒ PT $\frac{1}{2}$ ☐ NPT $\frac{1}{2}$ ☐ PT $\frac{3}{4}$ ☐ NPT $\frac{3}{4}$

☒ 304SS ☐ OTHER _____

NO.	LENGTH(mm)	Q'TY
	U	
1	370	3
2	520	3

THIS DRAWING AND SPECIFICATIONS HEREIN ARE THE PROPERTY OF THE NEWINS AND MUST NOT BE LOANED OR OTHERWISE TRANSFERRED TO ANY THIRD PARTY OR REPRODUCED COPIED, OR USED IN CONNECTION WITH THE MANUFACTURE, PURCHASE, OR SALE OF ITEMS WITHOUT WRITTEN CONSENT OF NEWINS

DIMENSIONS ARE ON MILLI METER GENERAL MACHINING TOLERANCES
ABOVE 1 UNDER 4 ±0.1
GREATER THEN 4 UNDER 16 ±0.2
GREATER THEN 16 UNDER 63 ±0.3
GREATER THEN 63 UNDER 250 ±0.5
GREATER THEN 250 UNDER 1000 ±0.8
ANGLE DIMENSIONS ±0.5

DRAWING TITLE :

RESISTANCE BULB

PROJECTION

THIRD ANGLE PROJECTION

FINISH

Q'TY

SCALE

N/S

UNIT

mm

DWG.NO.

NEWINS co.,ltd.

	SIGNATURE	DATE
DRAWN		
DESIGNED		
CHECKED		
APPROVED		

NO.	DESCRIPTION	DATE	REVISIONS BY	APPROVED BY
-----	-------------	------	--------------	-------------

REVISION